

Goods Lift Range

Innovate
LIFTING SYSTEMS

TRAVEL UP TO 18M

CARRY UP TO 2000KG

IDEAL FOR GOODS TRANSPORTATION

INTEGRATES WITH EXISTING SYSTEMS



Designed for perfect integration into existing racking, storage systems and buildings, the Goods Lift Range provides flexibility, adaptability and reliability.

The versatile Goods Lift Range will integrate perfectly into all types of buildings and is an ideal solution where a mezzanine floor must be added. The unit is supplied completely self-contained within its own modular shaft structure and there is no need for a separate machine room. The lift can be installed with the minimum amount of builders work, making the Goods Lift Range a cost effective method for goods transportation.

The lift does not require a pit and is provided with a low incline ramp for entry and exit. However, the lift can be installed within a shallow pit, if site conditions permit.

PRODUCT FEATURES

- ▶ Unique free-standing shaft
- ▶ No pit required
- ▶ Maximum load capacity 2000kg
- ▶ Travel up to 18 metres
- ▶ Serves up to 2-6 floors
- ▶ Operational speed 0.2m/s
- ▶ No separate machine room
- ▶ Modular design
- ▶ Special cabin sizes available
- ▶ Can be relocated



Technical Specifications for the Goods Lift Range

Goods Lift 500

Load capacity: 500kg, Cabin Size (w x d): 1100 x 1500mm

Entrances	Stops	Model
Above	2	Goods Lift 500 / 2-U
	3	Goods Lift 500 / 3-U
Opposite	2	Goods Lift 500 / 2-G
	3	Goods Lift 500 / 3-G

Goods Lift 1000


Load capacity: 1000kg, Cabin Size (w x d): 1200 x 1600mm

Entrances	Stops	Model
Above	2	Goods Lift 1000 / 2-U
	3	Goods Lift 1000 / 3-U
Opposite	2	Goods Lift 1000 / 2-G
	3	Goods Lift 1000 / 3-G

Goods Lift 1500

Load capacity: 1500kg, Cabin Size (w x d): 1400 x 2000mm

Entrances	Stops	Model
Above	2	Goods Lift 1500 / 2-U
	3	Goods Lift 1500 / 3-U
Opposite	2	Goods Lift 1500 / 2-G
	3	Goods Lift 1500 / 3-G

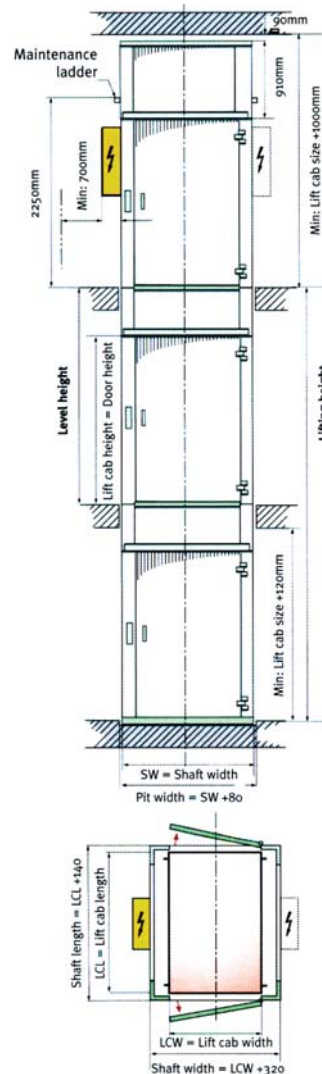

OPTIONAL EXTRAS

In addition to the standard lift sizes listed, lifts with cabin dimensions specific to individual applications are available, making the Goods Lift Range adaptable for installation in non-standard environments.

For example, the lift can be adapted to meet explosion proof legislation or can be manufactured to be used in cold store applications.

FOR FURTHER INFORMATION

For professional advice, a quotation or further details on any of our lifting systems please contact us at:

The Southborough Centre, Warehouse No.1, Draper Street, Southborough, Tunbridge Wells, Kent TN4 0PG

T: 01892 557530

F: 01892 557531

E: info@innovatelifts.com

W: www.innovatelifts.com

All information in this leaflet is correct at the time of printing. Innovate Lifting Systems reserve the right to make technical alterations due to product development.

Innovate
LIFTING SYSTEMS