

Waiver:
This data sheet is for guidance only and must not be used for proper working drawings. Owing to our policy of continual improvement we reserve the right to alter specification and dimensions without prior notice.

INNOVATE TROLLEYLIFT




The Southborough Centre
Warehouse No.1
Diaper Street, Southborough
Tonbridge Wells, Kent TN11 0PG
T: 01892 557530
F: 01892 557531
E: info@innovatelifts.com
W: www.innovatelifts.com

TROLLEYLIFT STRUCTURAL OPENING DETAILS FOR HINGED DOORS


For guidance only

IMPORTANT NOTE: The entrance front at the top floor served **MUST NOT** be built until after we have installed the lift, it must be left open for full width of lift shaft and from the serving level to the top of the lift shaft. If the entrance front is built it will need to be removed before we can install the lift.

Denotes entrance positions

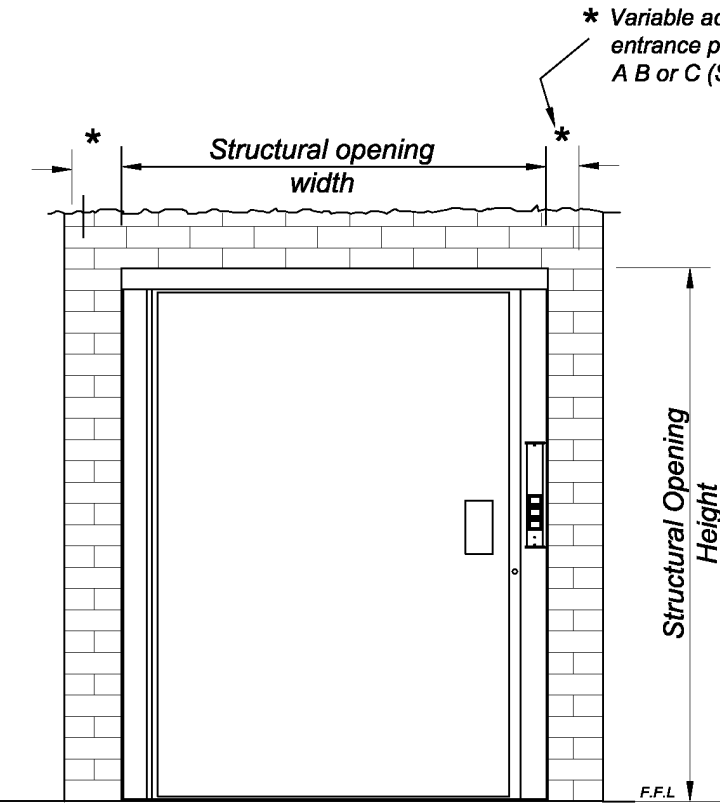

ELEVATION

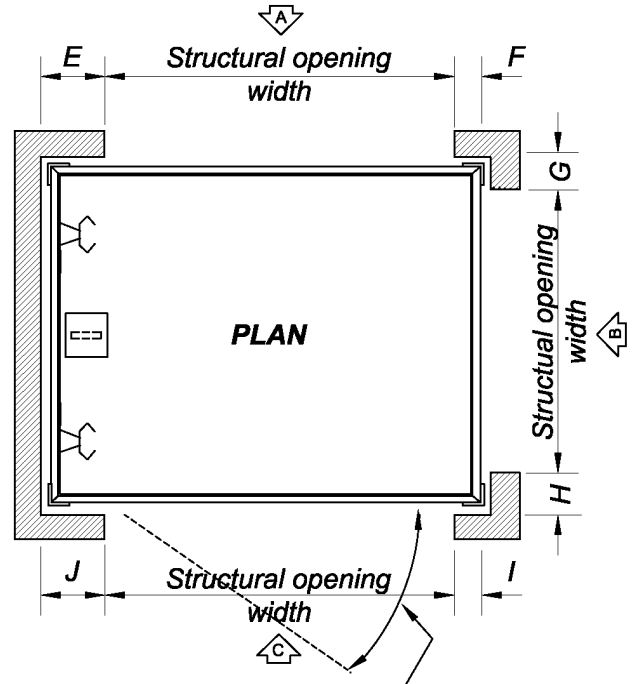

The swing of the hinged doors = 945

NOTE: The structural opening dimensions given include for 25mm clearance around our entrance box liners. This gap will have to be infilled upto the edges of the entrance box liners by others after installation. You may have to infill the floor upto the landing door cills at all levels.

The dimensions shown are with the lift structure positioned centrally within the standard lift shaft dimensions. Achieving this position is dependant on the lift shaft being plumb. If the lift shaft is **not plumb** we **may not** be able to fit the landing entrance(s) unless the front(s) are altered.

Model	Entrance position	Structural opening width	Structural Opening height	E	F	G	H	I	J
250H 1200 High	A,B,C	1130	1310	130	60	95	95	55	135
250H 1375 High	A,B,C		1485						
300H	A,B,C		1910						

**DATA SHEET
DS.0016**

ALL DIMS IN MMS

Issue No 2 10 April 06