

Vertical Platform Lift Premier

Innovate
LIFTING SYSTEMS

TRAVEL UP TO 13M

CARRY UP TO 400KG OR 5 PEOPLE

SUITABLE FOR WHEELCHAIRS

INTERNAL OR EXTERNAL USE



Vertical Platform Lift Premier is Innovate's newest range. Developed with a focus on design and engineering expertise, the result is a new generation of modern state-of-the-art platform lifts.


Combining the latest technology, aesthetic elegance, new materials, attractive pricing and a choice of options makes the Premier range the perfect accessibility solution for all types of buildings.

The **standard model** offers a broad range of alternative materials and colours. Supplied with a 1.1m high vertical fascia with integrated control panel, and ready made with steel shaft panels or toughened and laminated safety glass for a fast and efficient site installation.

Alternatively the **deluxe model** has a 2.2m high vertical fascia with integrated control panel, is supplied with an overhead light fitting, glass mirror and also offers a range of finishes.


PRODUCT FEATURES

- ▶ Sensitive safety edge
- ▶ New control system enables smartcard use
- ▶ Natural anodised aluminium control panel with: large vandal resistant easy-to-use tactile push buttons; emergency light; stop button; clear, visible, easy-to-read instructions
- ▶ Softly moulded hand rail in natural anodised aluminium for a firm and comfortable grip
- ▶ Finished in RAL 9006 as standard but can be painted in any optional RAL colour
- ▶ Hidden screws provide a smooth surface finish

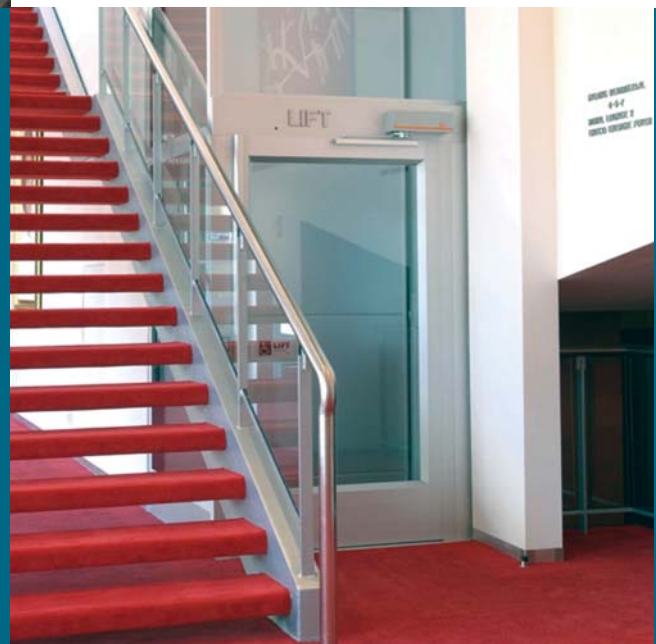

Technical Specifications for the Vertical Platform Lift Premier

Location	Internal or external
Travel	Up to 13m (max 6 landings)
Rated Load	400kg / 350kg
Rated Speed	0.15 m/s
Platform Size	1500 x 1000 / 1500 x 1100 (length x width)
Footprint	1600 x 1400 / 1600 x 1500 (length x width)
Shaft	Steel panels Pre-painted in off-white RAL 9016
Door configuration	Single entry, open through, adjacent
Doors	Single hinged doors or gates Steel door fronts pre-painted in off-white RAL 9016 Aluminium door fronts made in natural anodized aluminium
Door dimensions	2000 x 900 mm
Gate dimensions	1100 x 900 mm
Control system	Micro computer based control system
Power supply	400V AC, 3-phase, 50/60Hz 16 amp starting current Soft start and stop as option (220 - 240 V 1-phase frequency converter) (230 - 400 V 3-phase frequency converter)
Motor power	2.2 KW
Fault alarm	A potential free contact can be connected to central alarm units, receptions etc

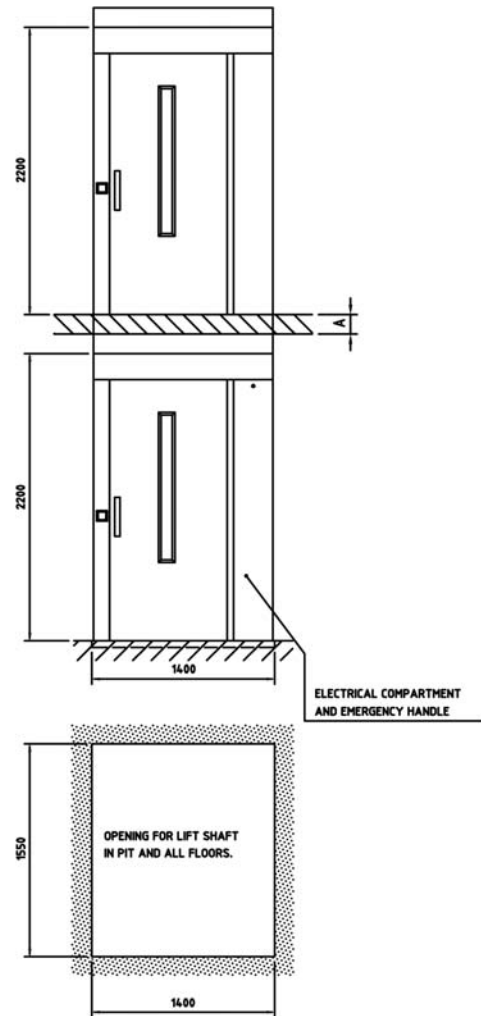

All information in this leaflet is correct at the time of printing. Innovate Lifting Systems reserve the right to make technical alterations due to product development.

OPTIONAL EXTRAS

Battery lowering device
Automatic lighting system
Automatic door openers
Voice annunciation
Arrival bell
IR control
Telephone (wall telephone, safeline etc)
Locking alternatives (smartcard, school lock system etc)
Fold down seat
Elbow contact
Kit for external installation
Control panel, hand rail and upper sensitive safety edge are available in optional surface coatings to resemble birch, beech, alder-tree and white marble

FOR FURTHER INFORMATION

For professional advice, a quotation or further details on any of our lifting systems please contact us at:

The Southborough Centre, Warehouse No.1, Draper Street, Southborough, Tunbridge Wells, Kent TN4 0PG

T: 01892 557530
F: 01892 557531
E: info@innovatelifts.com
W: www.innovatelifts.com

Innovate
LIFTING SYSTEMS