
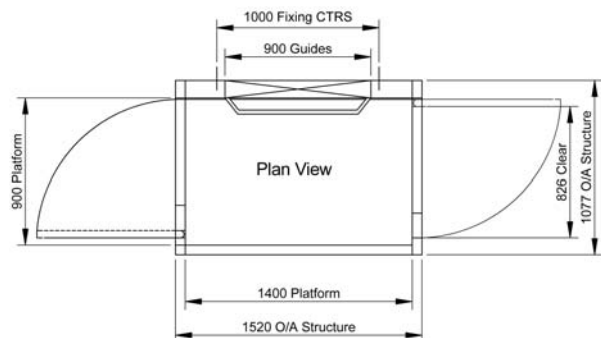


# Technical Specifications for the Vertical Platform Lift 5000

Drive	Direct acting hydraulic
Travel	Up to 5 metres
Load Capacity	300 kg
Power Supply	240 volts single phase
Speed	0.1 m/s
Platform Sizes	900mm x 1250mm 900mm x 1400mm 1100mm x 1400mm
Floor Recess	85mm. If this is not available a short ramp can be provided
Landing Controls	Constant pressure 'Call' button at each landing
Platform Controls	'Up' 'Down' designation with emergency stop and alarm buttons
Doors	Electrically and mechanically interlocked part glazed doors at each landing, complete with self closers
Colours	Pearl White, Beige or Light Grey
Safety Features	Battery backed alarm and emergency lowering High pressure release valve Platform and carriage safety edges Voice annunciation and directional indicators

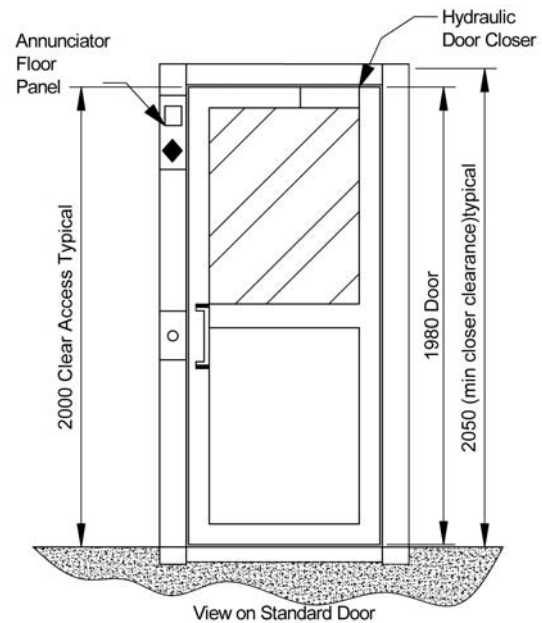

## OPTIONAL EXTRAS

- Fire rated doors
- Automatic door openers
- 400kg load capacity
- Special colours or stainless steel enclosure
- Glass panelled enclosure

## FOR FURTHER INFORMATION

For professional advice, a quotation or further details on any of our lifting systems please contact us at:

The Southborough Centre, Warehouse No.1, Draper Street, Southborough, Tunbridge Wells, Kent TN4 0PG

T: 01892 557530  
F: 01892 557531  
E: [info@innovatelifts.com](mailto:info@innovatelifts.com)  
W: [www.innovatelifts.com](http://www.innovatelifts.com)

All information in this leaflet is correct at the time of printing. Innovate Lifting Systems reserve the right to make technical alterations due to product development.

**Innovate**  
LIFTING SYSTEMS